




## MORE INFORMATION FOR A BETTER CONTROL

### Options:

- Range limiter
- Automatic frequency selection
- CAN bus
- Serial port
- LCD with machine identification and battery level indicator
- LCD with feedback



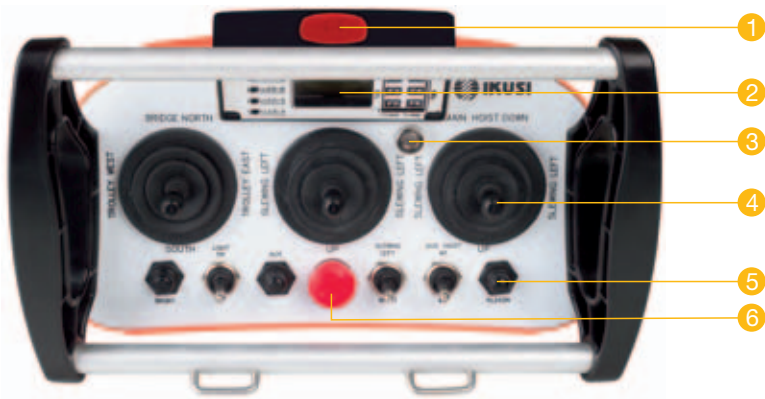

- 1 Range limiter (optional).
- 2 LCD (optional).
- 3 LED.
- 4 Multi-step or stepless two-axis joystick.
- 5 Auxiliary comands.
- 6 Stop console box.
- 7 Start console box.
- 8 Contact key.
- 9 Battery.

## TECHNICAL SPECIFICATIONS

Transmitter	T70/3	T70/4
Protection		IP65
Autonomy		16h (50% duty cycle)
Temperature		-20 to +65°C
Joysticks	2	3
Auxiliary comands	4	6
Weight included battery	1650 g	1950 g

Receiver	R70/13	R70/21
Power supply	48, 115, 230 Vac ± 10%; 50/60 Hz Optional 12 or 24 Vdc	
Dimensions	285 x 200 x 110 mm	
Protection	IP55	
Consumption	12 VA	20VA
Output comands	13	21
Other outputs	Start + STOP + Safety	
Output relays	230 Vac/8A	
STOP relays	230 Vac/6A	

Battery charger	CB60
Power supply	230 Vac ± 10%; 50 Hz Optional 115 Vac ± 10%; 12 or 24 Vdc

Batteries	BT12K
Capacity	1200 mAh, 4.8 V
Charge temperature	5 to 35°C



**MORE INFORMATION  
FOR A BETTER  
CONTROL**



Ikusi - Ángel Iglesias, S.A.  
Paseo Miramón, 170  
20009 San Sebastián  
SPAIN

Tel.: +34 943 44 88 00  
Fax: +34 943 44 88 20  
tlc@ikusi.com